

# Blü-Test from BAPI.

NIST traceable test instruments for temperature, relative humidity, and differential pressure. Data-logging with wireless smart device communication.



**NOW SHIPPING!**



Test data is available immediately on the probe's OLED display, or sent to the Blü-Test app for data logging. Data points can be logged, graphed or emailed. Each Blü-Test probe comes with a National Institute of Standards and Technology (NIST) traceable certificate of calibration.




# Features of the Blü-Test Application.



With the Blü-Test app, measurement data can be logged, graphed or emailed. The app will detect any Blü-Test probe sensor that is in range and powered on. When logging, the data is stored on the probe and completed logs will automatically download to your smart device. You can choose from a traditional gauge view or see trending data on a graph.



**Devices** - Lists all probes that are in communication with the app. Select probes to view live data or logs to graph or share.

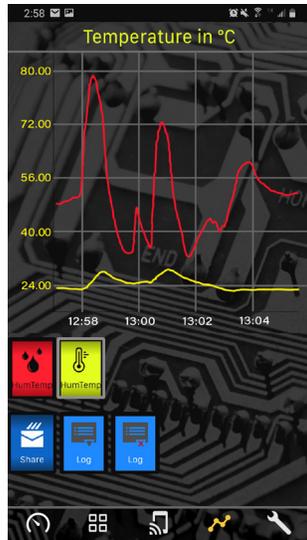

**Graphs** - Screen where you can display selected logs or live data as a graph. Users can also share the data via .CSV file.



**Dashboard** - Location where up to 6 probes can be displayed simultaneously with their current readings.



**Gauge** - Screen where one device can be displayed on a traditional gauge for easy viewing.

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries and regions. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google LLC.

## Ordering

Part Number	Description	List Price
BA/BT-TP	Blü-Test Temperature Probe, 4" length piercing, 1/8" diameter (10.2 cm x .32 cm)	\$600
BA/BT-TA	Blü-Test Temperature Probe, 6" length, 1/4" diameter (15.3 cm x .64 cm)	\$600
BA/BT-TB	Blü-Test Temperature Probe, 9.5" length, 1/4" diameter (24.2 cm x .64 cm)	\$600
BA/BT-TH	Blü-Test Temperature/Humidity Probe, 8" length, 3/8" diameter (20.3 cm x .95 cm)	\$675
BA/BT-DPLR	Blü-Test Pressure Probe, Low Range, -1 to 1" WC (-250 to +250 Pa)	\$800
BA/BT-DPSR	Blü-Test Pressure Probe, Standard Range, -5 to 5" WC (-1,250 to +1,250 Pa)	\$800
BA/BT-HVAC-CASE	Carrying case for Blü-Test probe suite, holds up to six probes	\$125*
BA/BT-HVAC-BUNDLE	All six probes listed above in a carrying case	\$4,075
BA/BT-A-RECERT	Recertification of Blü-Test Temperature Only Probe	\$50**
BA/BT-B-RECERT	Recertification of Blü-Test Temperature/Humidity Probe	\$100**
BA/BT-C-RECERT	Recertification of Blü-Test Differential Pressure Probe	\$100**
BA/BT-A-REFURB	Refurbishment of Blü-Test Temperature Only Probe	\$50**
BA/BT-B-REFURB	Refurbishment of Blü-Test Temperature/Humidity Probe	\$100**
BA/BT-C-REFURB	Refurbishment of Blü-Test Differential Pressure Probe	\$100**

\* Buy and resell

\*\* Net pricing

### Building Automation Products, Inc.

750 N. Royal Ave., Gays Mills, WI 54631

+1 608-735-4800 | [www.bapihvac.com](http://www.bapihvac.com) | [sales@bapihvac.com](mailto:sales@bapihvac.com)

