



**Electro-Well™ Models** Enables HydroStat's low water cut-off function.

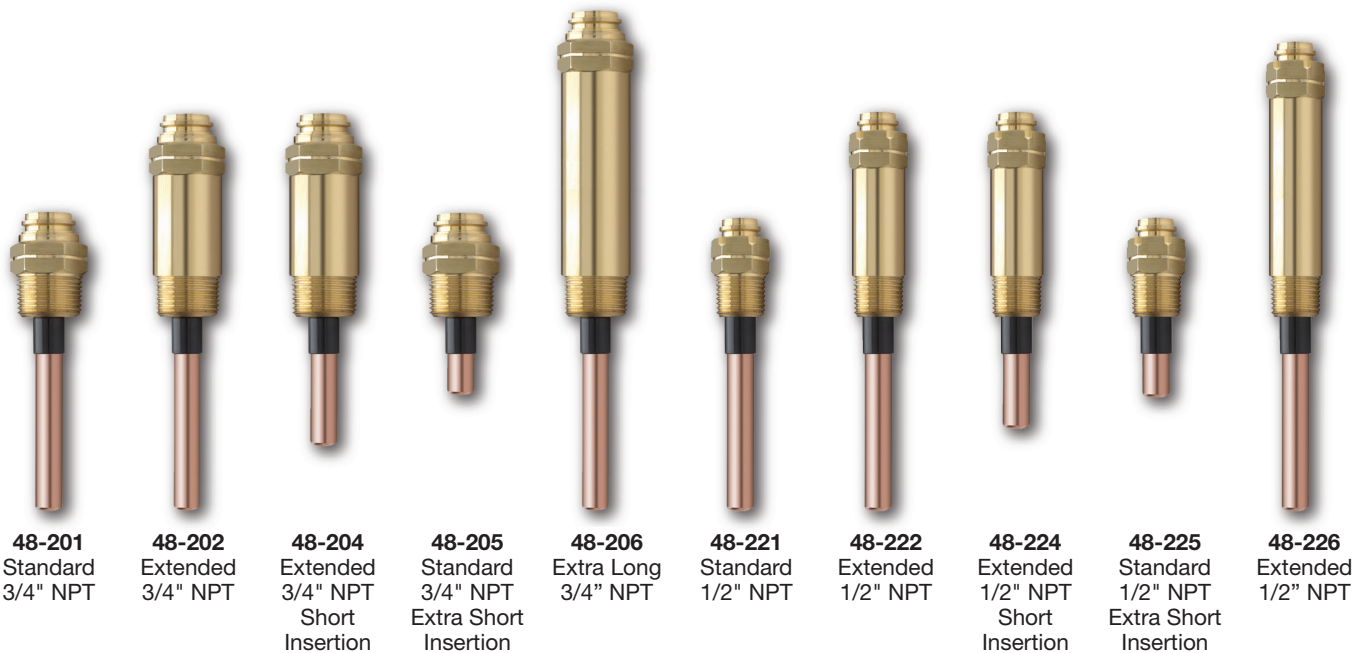

**Remote Mounting Options** For all HydroStat Models except 3000 Series



**Wall/Jacket Mounting Kit**  
Kit includes: 2 mounting brackets, remote sensor, plastic grommet, rubber well cap, 4 #8x1/2" self-tapping screws.



**Pipe Mounting Kit**  
Kit includes: mounting bracket for 1" to 2" pipe, remote sensor, plastic grommet, rubber well cap.

- 48-101** HydroStat Wall/Jacket Mounting Kit with 2' sensor
- 48-102** HydroStat Wall/Jacket Mounting Kit with 4' sensor
- 48-103** HydroStat Wall/Jacket Mounting Kit with 10' sensor
- 48-104** HydroStat Wall/Jacket Mounting Kit with 20' sensor

**48-121** HydroStat Pipe Mounting Kit with 4' sensor

**Specifications**

	<b>Model 3200-Plus</b>	<b>Model 3250-Plus</b>
Burner Contacts	30 VA@24 VAC	7.4 FLA, 44.4 LRA@120 VAC
Circulator Contacts	5.8 FLA, 34.8 LRA@120 VAC	5.8 FLA, 34.8 LRA@120 VAC
Operating Range – Low Limit	Off or 110°F - 200°F	Off or 110°F - 200°F
Operating Range – High Limit	100°F - 220°F	100°F - 220°F
Operating Range – Differential	Automatic – will vary between 10° and 20° subtractive based on control settings and boiler temperature	Automatic – will vary between 10° and 20° subtractive based on control settings and boiler temperature



PATENT NO. 7,891,572  
Others Pending



126 Bailey Road • North Haven, CT 06473  
(203) 776-0473 • FAX (203) 764-1711 [www.hydrolevel.com](http://www.hydrolevel.com)