




Scan to see a full specifications, installation and agency certification information.

### APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

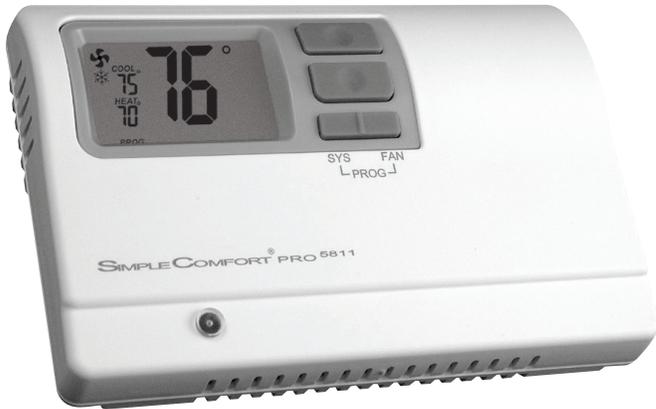

### FEATURES

- ✓ For two-stage heat/cool or two-stage heat pump
- ✓ 7-day, 5-2-day and 5-1-1-day programming
- ✓ Hardwired
- ✓ ICM patented thermal intrusion barrier
- ✓ Large backlit LCD display
- ✓ Auto or Manual changeover
- ✓ Adjustable temperature differential for each stage
- ✓ Permanent memory

### SPECIFICATIONS

- **Electrical rating:** 24 VAC (18-30 VAC), 1 amp maximum per terminal
- **Temperature control ranges:** 45°F to 90°F, Accuracy  $\pm 1^\circ\text{F}$
- **Easy access terminal block**
- **Terminations:** R, C, W1/O/B, Y1, W2, Y2, G, S1, S2

Content and specifications on sell sheets subject to change without notice.